


PANEL DATA SHEET



PSi 30 - 1.150,00 KG/MC

The panel consists of mineral support material inert monolayer original KNAUF INTEGRAL, density $\geq 1150 \text{ kg / m}^3$ with a nominal thickness of 30 mm, of calcium sulphate bound with fibers with high mechanical resistance. The material is certified to class A1 according to EN 13501-1. It also has several important certifications in the environmental field, such as IBR or VOC. The bottom side is coated, according to the needs, with a choice of materials that improve the characteristics. The panels are edged in plastic material antisqueak, a nominal thickness of 0.45 mm and a height equal to that of the panel. The nominal size of the panel depends on the caliber of the ceramic. The reduced dimensional tolerance causes the panel falls into Class 1 according to the reference standard EN 12825.

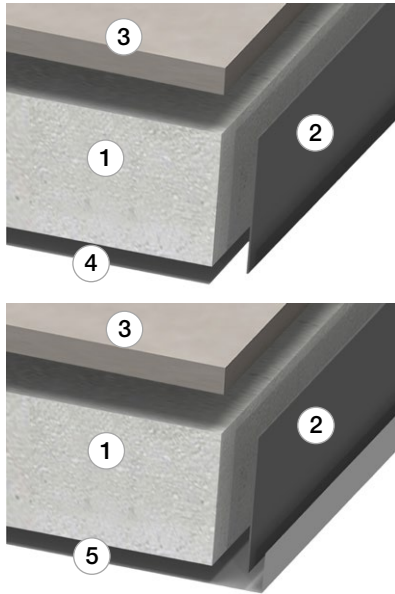

COMPOSITION

1 CORE

Modular monolayer panel of calcium sulphate, high density (1.150kg / mc) constituted of gypsum and cellulose fibers totally free from asbestos and particles of wood. Obtained with processes that ensure high homogeneity of mechanical characteristics and dimensional stability of the product

2 EDGE TRIM

Made of plastic material compound antisqueak, a nominal thickness of 0.45 mm and a height equal to that of the panel, totally free from PVC and self-extinguishing (class V0 UL94 standard).

3 TOP FINISH

HPL, PVC, linoleum, rubber, carpet, Flooring, Porcelain, Terracotta, marble, granites and reassembled, aluminum, steel sheet

4 BOTTOM FINISH

Aluminum foil thickness. 0.05mm ensures excellent barrier against humidity and fire and electrical continuity to the floor. Plate phenolic laminate that increases the stiffness, the mechanical characteristics and constitutes a moisture barrier

5 BOTTOM FINISH

Steel plate / pan of galvanized steel of thickness 0.5 / 0.9 mm which increases the stiffness, the mechanical characteristics and an excellent moisture barrier

Nominal characteristics

Dimension	600x600 mm
Thickness	30 mm
Panel weight	11,9 kg \pm 5%
Weight SQM	33,0 kg \pm 5%
Density	to 1.050 a 1.250 kg/mc \pm 5%

Physical characteristics

Dimensional deviations with resilient	
Electrical resistance, top finish excluded	
Self-extinguishing edging	
Walking sound level at 500Hz	
Fire rating	
Fire reaction rating	
Dimensional variation after 24H in water	
Water absorption after immersion 24H	

class 2 (UNI EN 12825/03)
1x10 ⁹ ohm max (EN 1081)
V0 (UL 94)
20 dB
REI 30 (UNI EN 13501-2/09)
Bfl-S1 (UNI EN 13501-1/09)
0,77% (EN317/93)
18% (ISO 769/72)

Mechanical characteristics (EN 12825)

PANELS WITH GRES TOP FINISH

Bottom finish	Aluminium							Steel sheet / steel tray					
	Type of structure	SAS	STQ	STS	STR	STO	STC	SAS	STQ	STS	STR	STO	STC
Concentrated load - center of the side	kN	2,2	2,2	2,3	2,6	2,6	3,3	2,9	3,2	3,3	3,6	3,6	4,0
Concentrated load - center of the panel	kN	3,5	4,0	4,1	3,0	3,3	3,9	5,1	5,1	5,2	5,4	5,4	5,8
Ultimate load	kN	4,5	4,8	5,0	5,3	5,4	7,0	13,1	13,8	14,0	15,1	15,4	18,0
Distributed load	kN/m ²	10,0	10,8	11,0	12,0	12,0	13,0	20,0	20,8	21,0	24,0	24,0	26,0
Class according to EN 12825		4/A	5/A	5/A	5/A	5/A	6/A	6/A	6/A	6/A	6/A	6/A	6/A

The concentrated and distributed loads refer to a 2,5 mm deflection. Deformations major than 1 mm may cause the ceramic to crack.

*1 kN = 102 kg